

figure

272

ends
formflange
straight

FLUXER

FLOAT VALVE zFLO

body material	nominal pressure	nominal diameter	max temperature
A grey cast iron	B 10 bar	DN 25-200	120°C



correspond to the pressure equipment directive 97/23/EC
marking CE for Dn≥32

FEATURES

- high tightness (leakproofness class - A acc. EN - 12266 - 1)
- environment-friendly
- no maintenance
- flanges drilled according to EN 1092-2
- face-to-face dimension according to EN 558-1 series 1

APPLICATION

- hot and cold water plants
- neutral fluids
- industrial technologies
- heat engineering






figure	272
ends	flange
form	straight


MATERIALS

DN 25-80

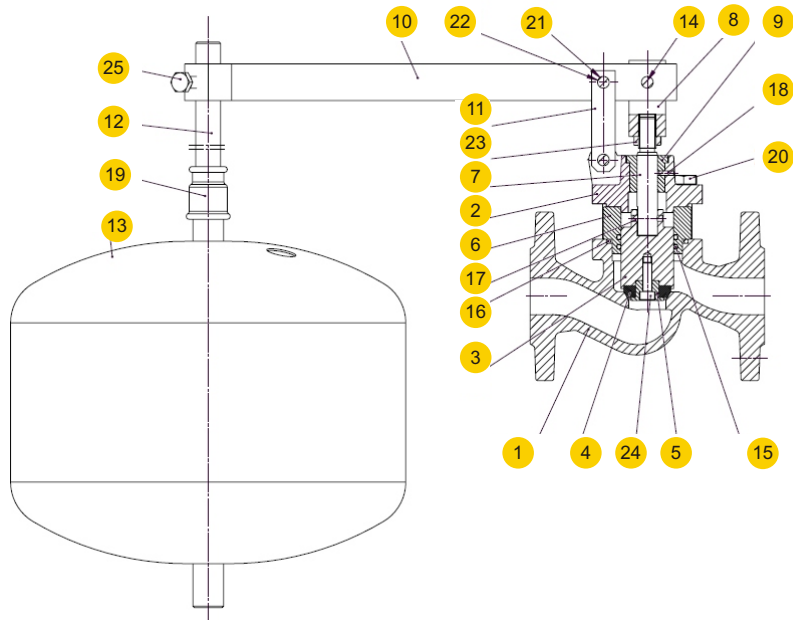

DN 100-200

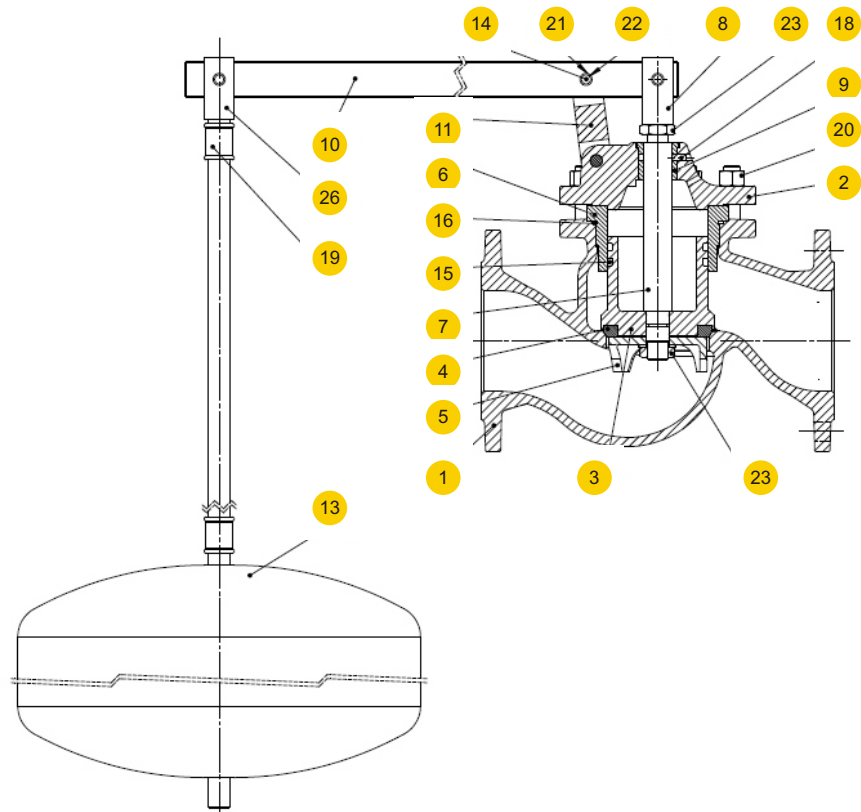



figure


272

ends
form

flange
straight

MATERIALS

	body material	A	
	type	16 (DN 25-80)	16 (DN 100-200)
1	body	EN – GJL-250 5.1301 (ex.JL1040)	
2	cover	EN – GJL-250 5.1301 (ex.JL1040)	
3	disc	X20Cr13 1.4021	
4	disc gasket	EPDM	
5	gasket holder	X20Cr13 1.40021	
6	piston sleeve	CuZn39Pb	CuSn11 P-C
7	stem	X20Cr13 1.4021	
8	stem fork	S235JR zinc galvanized	
9	stem sleeve	CuZn39Pb	
10	lever	S235JR zinc galvanized	
11	connector	S235JR zinc galvanized	
12	rod	S235JR zinc galvanized	-----
13	float	S235JR epoxide	
14	pin	X20Cr13 1.4021	
15,16	packing ring	EPDM	
17,18	straight pin	carbon steel	-----
19	reducer	malleable cast iron	
20	hexagon bolt	8.8 A2A	
21	washer	carbon steel zinc	
22	cotter pin	X5CrNi18-10 1.4301	
23	nut	8.8 A2A	
24	bolt	A2-70	-----
25	hexagon bolt	8.8 A2A	-----
26	float handle	-----	S235JR zinc
	max. temperature	120°C	



figure


272

ends
form


flange
straight

DIMENSIONS


DN 25-80

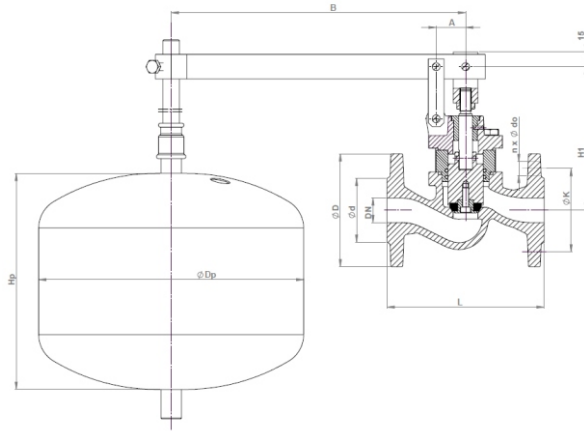

DN 100-200

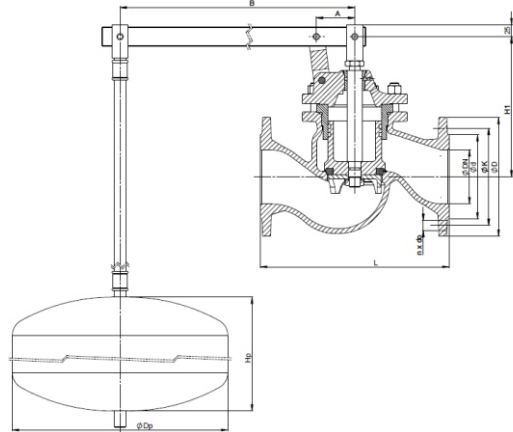

DN	PN 10												
	D	L	K	d	do	n	A	B	H1	Hp	Dp	Kvs	
mm												m³/h	kg
25	115	160	85	65	14	4	30	700	146	220	270	13	9,5
32	140	180	100	75	19	4	30	700	155	220	270	17,5	10,7
40	150	200	110	84	19	4	35	700	166	200	350	25	17,0
50	165	230	125	99	19	4	35	700	175	200	350	40	20,0
65	185	290	145	118	19	4	45	700	221	250	400	62	26,0
80	200	310	160	132	19	8	55	800	249	250	400	72	32,5
100	220	350	180	156	19	8	71	975	260	300	400	104	47,0
125	250	400	210	184	19	8	87	1190	320	300	500	156	69,0
150	285	480	240	211	23	8	102	1305	385	300	500	213	98,0
200	340	600	295	266	23	8	138	1590	420	400	500	360	149,0




figure

272

ends
form

flange
straight

PRESSURE-TEMPERATURE RATINGS

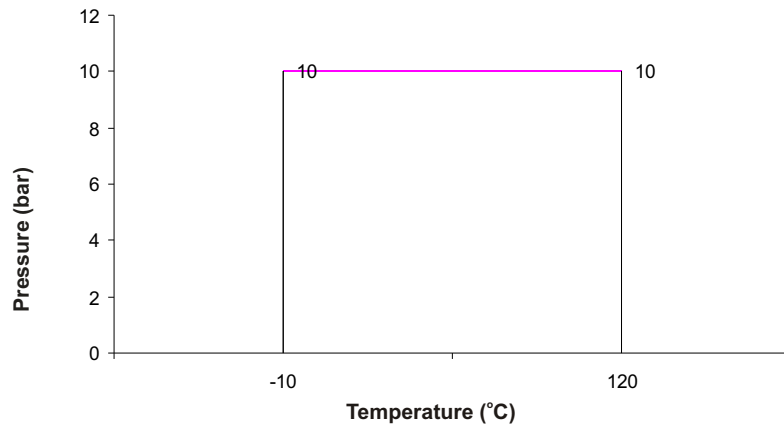

Allowed working conditions range
PN 10 EN-GJL-250





figure	272
ends form	flange straight

TYPES

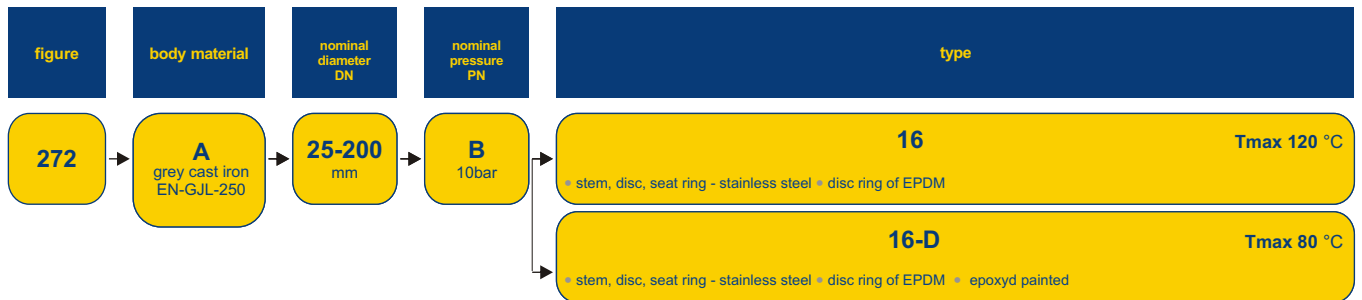

ORDERING

To place an order please use our product number (index)

