


Ra	JIS
0.2	▽▽▽
1.6	▽▽
6.3	▽
25	▽
▽	▽

0.5~5	±0.1
6~30	±0.2
31~120	±0.3
121~320	±0.5
321~1000	±0.8
GENERAL TOLERANCE	



C

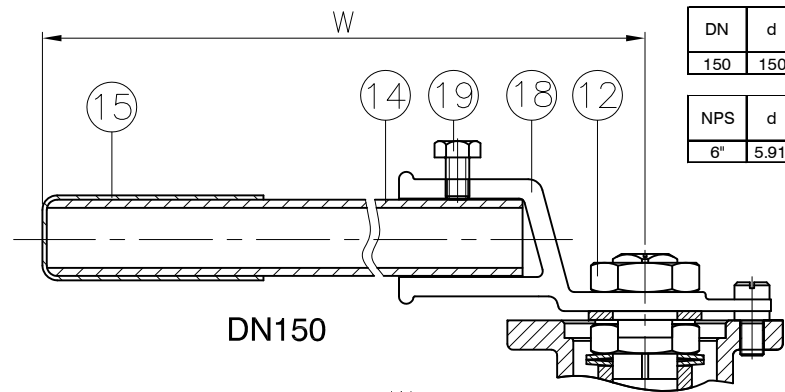

DN150

DN	d	G	C	D	L	H	H1	H2	W	D1	D2	T	f	M	N	S	Ra	Rb	ISO-5211	Torque (N-M)	
150	150	212	240	285	350	253	201	28	756	125	102	22	3	22	8	27	6.5	5.5	F10-F12	Breakaway	Action
																				212	150
unit:mm																					
NPS	d	G	C	D	L	H	H1	H2	W	D1	D2	T	f	M	N	S	Ra	Rb	ISO-5211	Torque (in-lb)	
6"	5.91	8.35	9.45	11.22	13.78	9.96	7.91	1.1	29.76	4.92	4.02	0.87	0.12	0.87	8	1.06	0.26	0.22	F10-F12	Breakaway	Action
																				1876.3	1327.6
unit:in																					

API 607 Fire Safe Approved

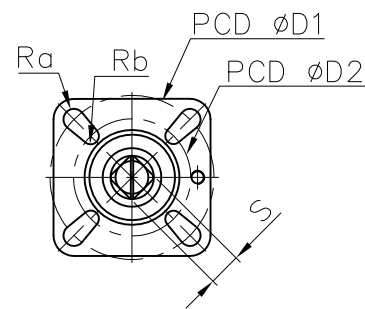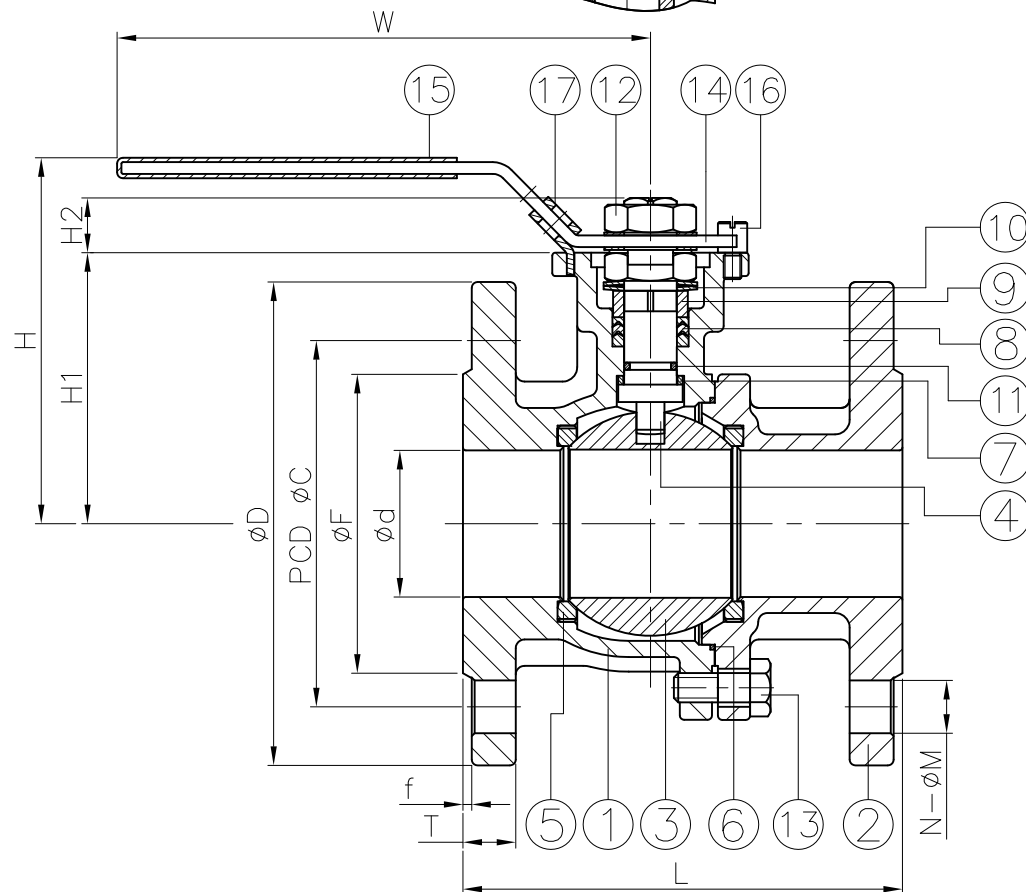

ITEM	PARTS	MATERIAL
1	BODY	1.4408 / 1.0619
2	CAP	
3	BALL	SUS 316
4	STEM	
5	SEAT	PTFE / RTFE
6	GASKET	GRAPHITE
7	THRUST WASHER	CTFE
8	PACKING	GRAPHITE
9	GLAND RING	SUS 304
10	BELLEVILLE DISC	SUS 301
11	O-RING	VITON
12	STEM NUT	SUS 304
13	STUD BOLT	
14	HANDLE	PVC
15	HANDLE SLEEVE	
16	STOP PIN	SUS 304
17	LOCKING DEVICE	
18	HANDLE HEAD	
19	HANDLE BOLT	

△			
△			
△			
Revise	Description	Date	Approve
DRAWING NO. KH2FD16IIT150			

CHECK BY	DRAWING BY	DATE	SPECIFICATION	2-PC Flanged End Ball Valve PN 40
	Ray	Jun.26.2012	MATERIAL	1.4408
			PROCESS/Nr.	
			UNIT / SCALE	mm