


KLW16IIT

1PC WAFER TYPE FULL PORT BALL VALVE FLANGE END



- Material ASTM-A351-CF8, ASTM-A351-CF8M
- Trim in: ASTM-A351-CF8M
- Flange: PN16
- Mounting Pad for ISO 5211
- Anti-static device, fire safe design
- Blow-out proof stem, lever operated
- Full port, solid ball

ITEM	PARTS	MATERIAL	Q' TY
1	body	ASTM - A351 - CF8M	1
2	ball	AISI 316	1
3	joint gasket	PTFE	1
4	ball seat	PTFE	2
5	cap	ASTM - A351 - CF8M	1
6	stem	AISI 316	1
7	thrust washer	PTFE	1
8	stem packing	PTFE	1
9	high washer	AISI 304	1
10	stem nut	AISI 304	2
11	handle	AISI 304	1
12	spring washer	AISI 304	1
13	plastic cover	PLASTIC	1
14	stop	AISI 304	1

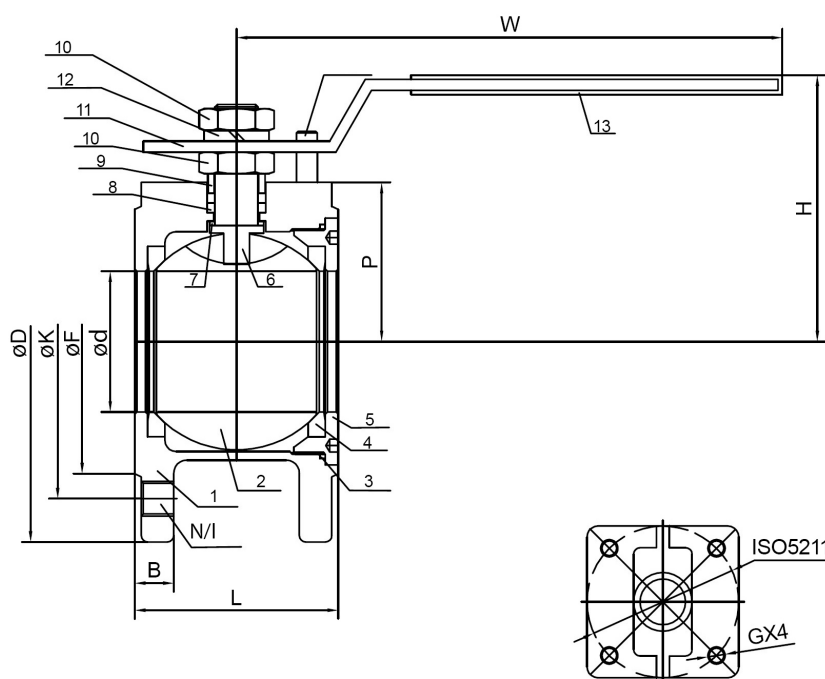

DIMENSIONS

UNIT: mm

DN	d	L	D	K	N/I	B	F	ISO5211 G	H	W	Cv FACTOR	TORQUE Kgf-cm
15	15	40	95	65	4-M12	14	45	F03X4	63	125	10	58
20	20	44	105	75	4-M12	16	58	F03X4	68	125	25	80
25	25	53	115	85	4-M12	16	68	F04X4	81	160	35	108
32	32	58.4	140	100	4-M16	16	78	F04X4	87	160	46	150
40	38	62	150	110	4-M16	16	88	F05X4	98	200	80	200
50	50	72	165	125	4-M16	18	102	F05X4	105	200	110	300
65	65	94	185	145	4-M16	18	122	F07X4	121	250	310	515
80	76	118	200	160	8-M16	20	138	F07X4	153	285	350	810
100	96	140	220	180	8-M16	20	158	F07X4	164	338	720	1130