

SM20M

MECHANICAL FEEDBACK INDICATOR FOR QUARTER-TURN VALVES


GENERAL FEATURES

- Aluminium die-casting housing with powder
- 2 mechanical switches SPDT (3 wires) type V3-900
- Voltage: max. 240 VAC - 16 A
- Dual cables entries: 2 x M20
- Terminal Strips: 8 points (0,08 - 2,5 mm²)
(Connection tot solenoid valve possible)
- Enclosure: weatherproof IP67
- Temperature: -20 °C ~ 80 °C
- Easy mounting: Namur standard stainless steel shaft and bracket



CE



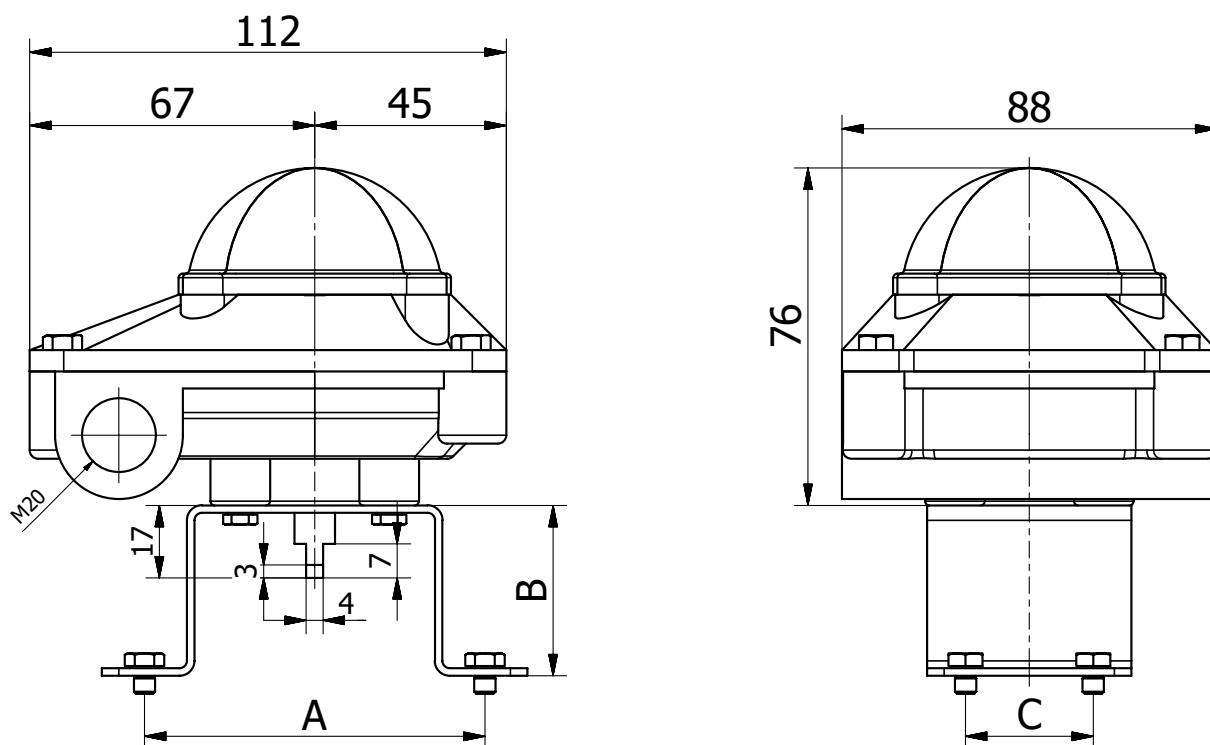

DIMENSIONS (mm)

Type	Config.	A	B	C	Kg
SBM351C	80H20	80	40	30	0,6
SBM351C	80H30	80	50	30	0,8
SBM351C	130H30	130	50	30	0,8

WIRING

