

Höhenverstellbarer Montagesatz für Hand-Armaturen

Adjustable mounting kit for manual valves  
DIN EN ISO 5211



Beschreibung Description

Mit diesem Montagesatz können Sie Ihre handbetätigten Armaturen ganz einfach mit einer Stellungsrückmeldung durch eine Endschalterbox ausrüsten. Es kann jede Endschalterbox aufgebaut werden, die unten eine F05-Schnittstelle hat. Die einzelnen Montageschritte sind in unserer zugehörigen Betriebsanleitung ausführlich beschrieben.

Der Montagesatz enthält folgende Teile:

- Oberteil (Edelstahl 1.4301) mit Anschluss F05 und Bohrbild 80x30mm für i-box
- Unterteil (Edelstahl 1.4301) passend zum Kopfflansch der Armatur
- Mitnehmerschraube, Edelstahl 1.4305
- Kontermutter (Edelstahl 1.4301) zur Höhenfixierung

This mounting kit helps you to add a position feedback in form of a limit switch box to your manual valve. You can mount any limit switch box that provides a F05 interface from below. The assembly steps are described in detail in the related operating manual.

The mounting kit includes the following parts:

- Upper part (AISI 304) with F05 flange and hole spacing 80x30mm for i-box
- Bottom part (AISI 304) matching the top flange of the valve
- Drive screw, stainless steel AISI 303
- Lock nut (AISI 304) for vertical adjustment


Model: MSH




>>> Jetzt auch für ISO F14 und F16 Now also available for ISO F14 and F16 <<<



Maßzeichnung Dimensions

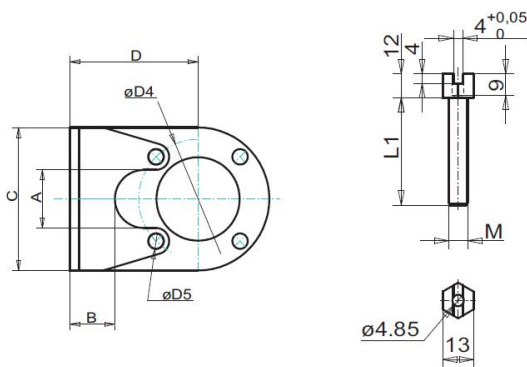

|    | MSH0503-... | MSH0504-... | MSH0505-... | MSH0507-... |
|----|-------------|-------------|-------------|-------------|
| A  | 16,00       | 20,70       | 24,36       | 34,50       |
| B  | 20          | 20          | 15          | 15          |
| C  | 60          | 60          | 60          | 65          |
| D  | 54          | 54          | 54          | 54          |
| D1 | 35,5        | 35,5        | 35,5        | 35,5        |
| D2 | 50          | 50          | 50          | 50          |
| D3 | 6,5         | 6,5         | 6,5         | 6,5         |
| D4 | 36          | 42          | 50          | 70          |
| D5 | 5,3         | 5,3         | 6,5         | 8,5         |
| H1 | 60          | 60          | 60          | 60          |
| H2 | 70          | 70          | 70          | 70          |
| H3 | 80          | 80          | 80          | 80          |
| H4 | 90          | 90          | 90          | 90          |
| H5 | 100         | 100         | 100         | 100         |

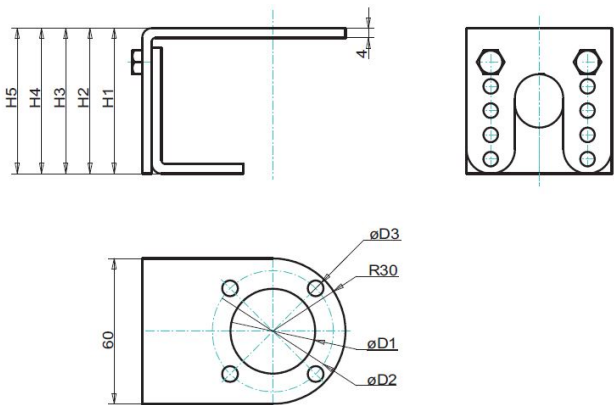

|    | MSH0510-... | MSH0512-... | MSH0514-... | MSH0516-... |
|----|-------------|-------------|-------------|-------------|
| A  | 52,12       | 66,39       | 70,99       | 81,93       |
| B  | 15          | 15          | 35          | 25          |
| C  | 93          | 111         | 127         | 152         |
| D  | 74          | 74          | 94          | 94          |
| D1 | 35,5        | 35,5        | 35,5        | 35,5        |
| D2 | 50          | 50          | 50          | 50          |
| D3 | 6,5         | 6,5         | 6,5         | 6,5         |
| D4 | 102         | 125         | 140         | 165         |
| D5 | 11          | 13          | 17          | 21          |
| H1 | 80          | 80          | 120         | 120         |
| H2 | 90          | 90          | 130         | 130         |
| H3 | 100         | 100         | 140         | 140         |
| H4 | 110         | 110         | 150         | 150         |
| H5 | 120         | 120         | 160         | 160         |

Artikelnummer Code number

MSH05

| Kopfflansch Armatur Top flange valve |
|--------------------------------------|
| 03 F03                               |
| 04 F04                               |
| 05 F05                               |
| 07 F07                               |
| 10 F10                               |
| 12 F12                               |
| 14 F14                               |
| 16 F16                               |

| Mitnehmerschraube Drive screw |
|-------------------------------|
| M4 M4x25 (M=4   L1= 25)       |
| M5 M5x60 (M=5   L1= 60)       |
| M6 M6x60 (M=6   L1= 60)       |
| M8 M8x60 (M=8   L1= 60)       |
| M10 M10x60 (M=10   L1= 60)    |
| M12 M12x60 (M=12   L1= 60)    |

